
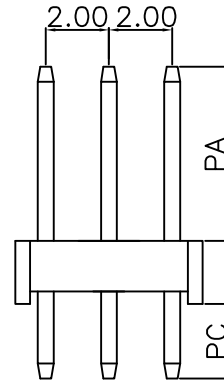
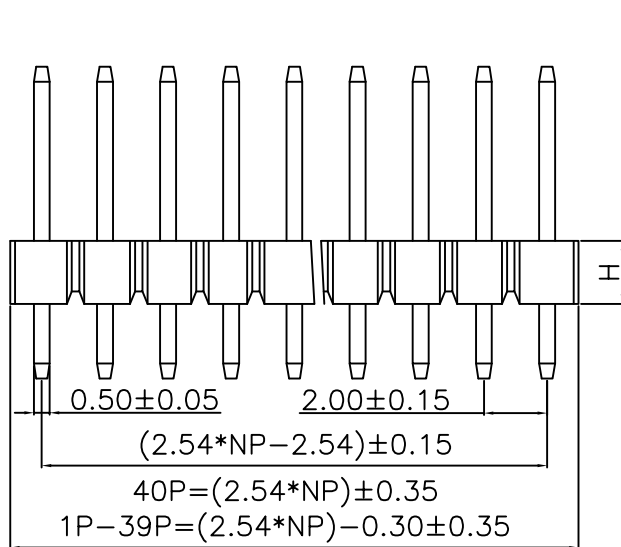


HSF RoHS

| | | | | |
|-----|--------|-------------|------|------|
| REV | ECN NO | DESCRIPTION | DATE | NAME |
| A | | NEW | | |

Specifications

- 1.Current Rating:2.0Amps
- 2.Insulation Resistance:1000 MΩ min.
- 3.Dielectric withstanding Voltage: 500V AC/DC
- 4.Contact Resistance:20 mΩ max.
- 5.Operating Temperature:-40°C to+105°C
- 6.Contact Material: Brass
- 7.Insulation Material:Asfollows,UL94V-0,Black
- 8.Plated: Au Over Ni

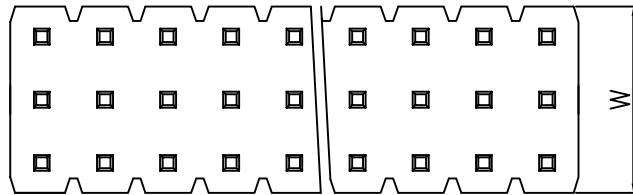


Ordering Information

L210 XX -XX 0 X X XX X

| | | | | | |
|--|-------------------------------|--|--|------------------|---|
| Insulation Height*Wide (H*W) Option: 20=2.00*6.0 | NO. of Pins Per Row: 1-50P | Insulation Material Option: 1=PBT 2=PPS 3=NY6T 4=LCP 5=NY66 6=Customized 7=NY46 8=NY9T | Contact Plating 0=0.8" Gold 1=Au1" Gold 2=Au1.5" Gold 3=Au2" Gold 4=Au3" Gold 5=Au5" Gold 6=Customized 7=Gold/Tin 8=Tin | Serial NO. 01-69 | Packing A=PE Bag B=Tube C=Tray D=Reel |
|--|-------------------------------|--|--|------------------|---|

| Dimension antitheses list | | | | |
|---------------------------|------|------|------|------------|
| ITEM | PC | PA | H | Pin Length |
| Standard | 2.60 | 3.80 | 2.00 | 8.40 |
| Alternate | | | | |

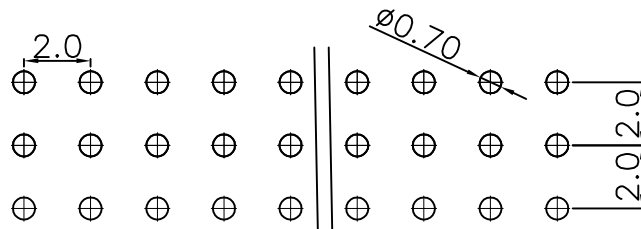

PCB LAYOUT

| | |
|---------------------------------------|----------|
| STANDARD TOLERANCE (EXCEPT SPECIFIED) | |
| LINER | ANGLES |
| .0 ±0.30 | 0.° ±3° |
| .00 ±0.20 | .0° ±2° |
| .000 ±0.10 | .00° ±1° |

LDCONN 东莞连大精密制品有限公司
 大 DongGuan LianDa Precision Products Co., LTD

| | | | | |
|------------|---|-------------|-----|----------|
| TITLE | PH2.00mm Pin Header Three lines 180° | DRAWN BY | YTT | 16.02.03 |
| PART NO | L21020-XX0XXXXA | CHECKED BY | | |
| DRAWING NO | | APPROVED BY | | |
| SCALE | 1:1 | UNIT | mm | PAGE 1/1 |
| | | | | SIZE A4 |