
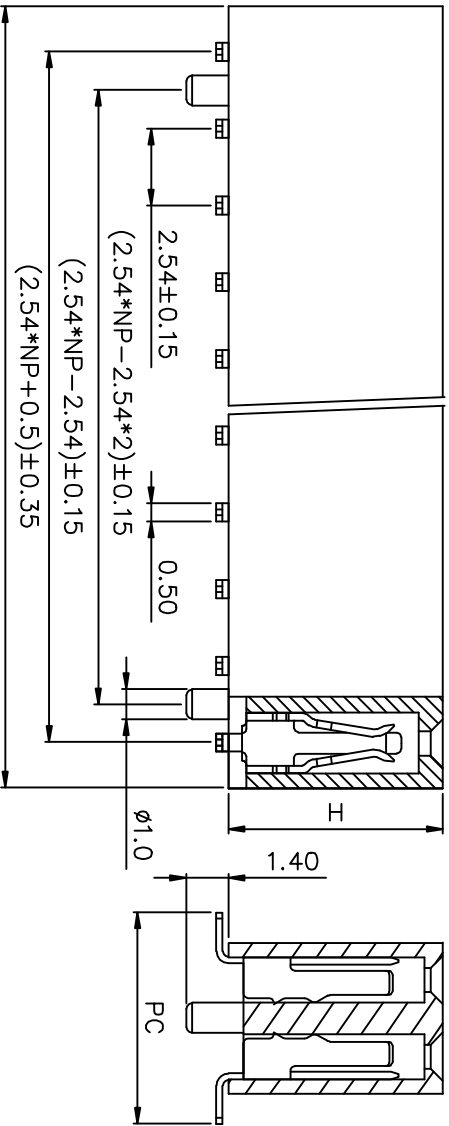


# HSE RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

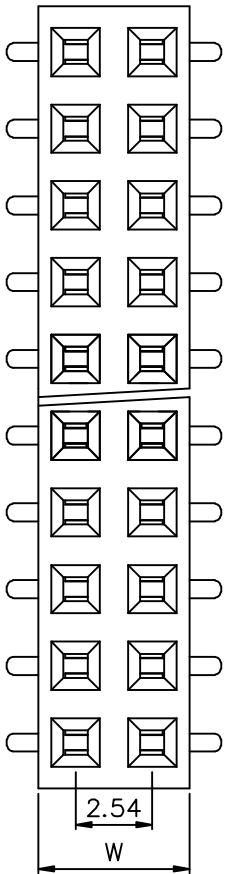

### Specifications

1. Current Rating: 3Amps
2. Contact Resistance: 20mΩ
3. Insulator Resistance: 1000 Megohms min.
4. Dielectric withstanding Voltage: AC/DC 1000V
5. Operating Temperature: -40°C to +105°C
6. Contact Material: Copper alloy
7. Insulator Material: Asfollows
8. Plated: Asfollows

### Ordering Information

L308 XX-XX 2 X XX X


Insulation Height*W/ide Per Row: 1-40P	NO. of Pins	Insulation Material	Contact Plating	Serial NO.	Packing
Option: 50=5.0*5.2 57=5.7*5.0 71=7.1*5.0 85=8.5*5.0	Option: 1=PB1 2=PRS 3=NV6T 4=LCP 5=NV66 6=Customized 7=NV46 8=NV9T	Option: 0=0.8" Gold 1=1Aul" Gold 2=1Aul.5" Gold 3=1Aul2" Gold 4=1Aul3" Gold 5=1Aul5" Gold 6=Customized 7=Gold/Tin 8=Tin	Option: 01-69 (No pillars) 70-89 (pillars) 90-99 (outside pillars)	0=C=Tray D=Reel	A=pp Bag B=Tube C=Tray D=Reel

Dimension antitheses list

ITEM	PC	H	W
Standard	6.8/7.1	5.0/5.7/7.1/8.5	5.0/5.2
Alternate			

**LDCONN 东莞连大精密制品有限公司**  
**Dongguan LianDa Precision Products Co., LTD**

STANDARD TOLERANCE (EXCEPT SPECIFIED)	LINER	ANGLES	TITLE	PART NO	DRAWING NO	DRAWN BY	CHECKED BY	APPROVED BY
.0 ±0.30	0.°	±3°	Pkg 54mm 2XPE SMT Dual Row Female Header With Post	L308XK-XXXXXXX		LuJunhui		
.00 ±0.20	.0°	±2°						
.000 ±0.10	.00°	±1°						

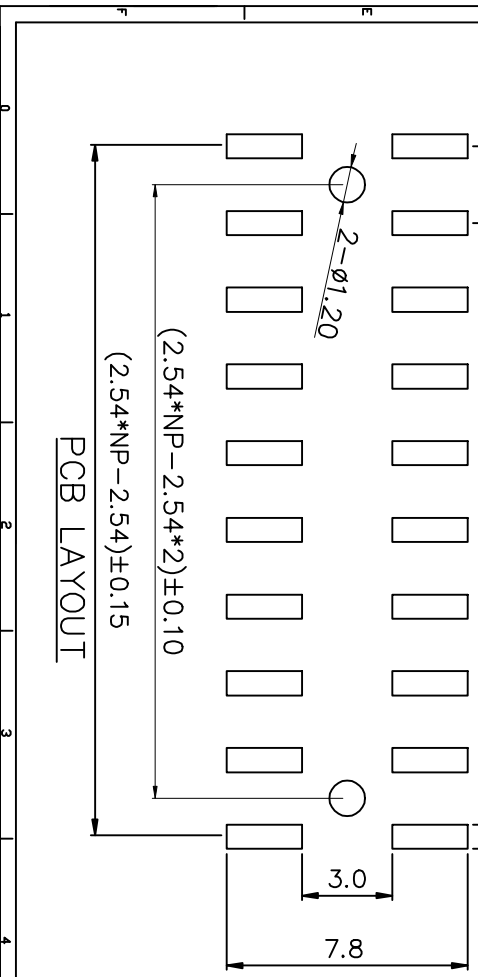

0 1 2 3 4 5 6 7 8 9