

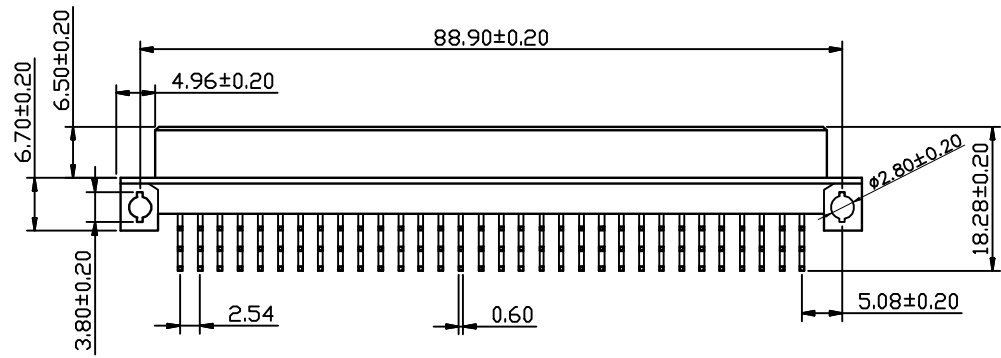


REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

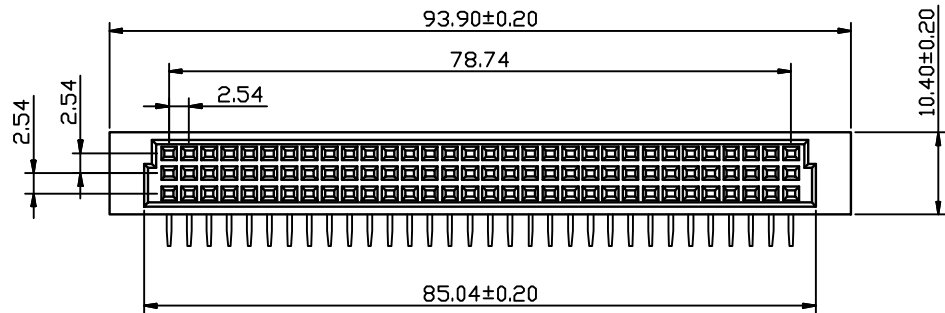

SPECIFICATIONS
 Rated Current: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -55°C to +105°C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Standard: PBT

Ordering Information
L496XX - X X XX X


NO. of Pins
 Per Row:
 1-50P

The product type
 0. 180°
 1. 90°
 2. SMT
 9. Welding line

Serial NO.
 01-99

Contact Plating
 0. Au0.8u"
 1. Au1.0u"
 7. half gold half tin plating
 8. Bright tin plating

Packing
 A=PE Bag
 B=Tube
 C=Tray
 D=Reel

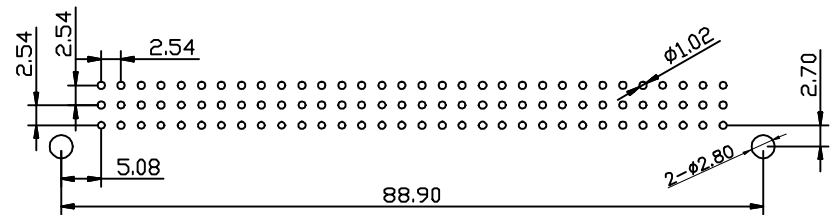

P.C.B LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

LDCONN 东莞连大精密制品有限公司
 连大 DongGuan LianDa Precision Products Co., LTD

TITLE	PHL 54mm-J DIN 41618 Female Three rows Right Angle Type	DRAWN BY	Lujunhui	18.10.30
PART NO	L496XX-17XXX	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4