

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW	3/25-'20	XXL





SPECIFICATIONS:

CURRENT RATING:3A AC,DC
 VOLTAGE RATING:100V AC,DC
 TEMPERATURE:30mΩ MAX.
 INSULATION RESISTANCE:1000MΩ MIN.
 WITHSTANDING VOLTAGE:500V AC/MINUTE
 MATERIAL:
 PIN MATERIAL:BRASS/TIN-PLATED

Ordering Information

L105XX - X X X X XX X

P数	材质类型	特殊形态	包装类型
1、单排	2	0、无	A袋装
2、双排	、	1、打"K"点	B管装
产品类型	3、NY6T	2、	C盘装
0、180°	4、LCP	3、带柱	D卷装
1、90°	5、NY66	4、	
2、SMT	6、	5、直背	
3、卧贴	7、NY46	6、弯背	
4、反位立贴	8、PA9T		

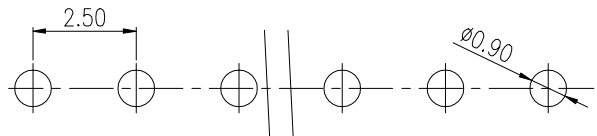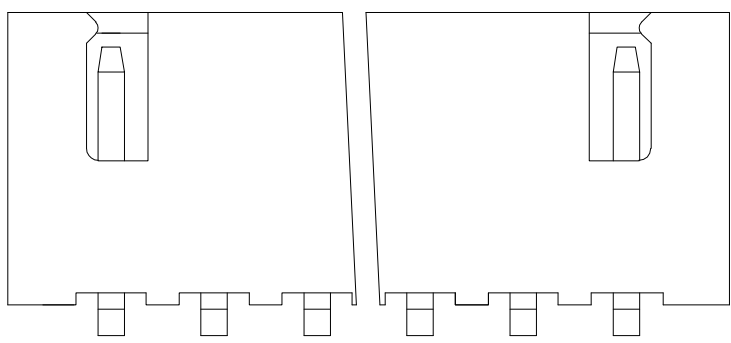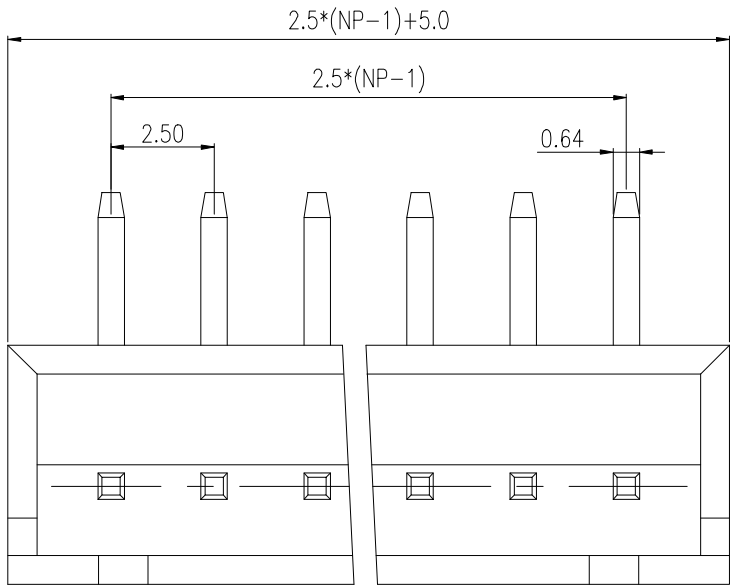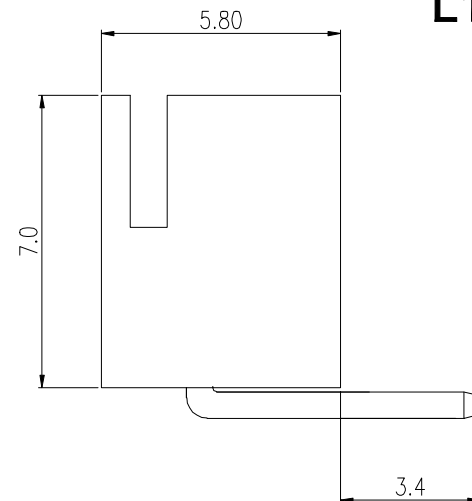

PCB LAYOUT

TOLERANCE UNLESS OTHERWISE SPECIFIED	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

		东莞连大精密制品有限公司 DongGuan LianDa Precision Products Co., LTD			
		TITLE	WAFER-Z PH2.5 NP 90° 白色	DRAWN BY	XXL
PART NO	L105XX-1150XXA	CHECKED BY			
DRAWING NO		APPROVED BY			
SCALE	1:1	UNITE	mm	PAGE	1/1
				SIZE	A4