


# WT125D Connector 1.25mm Pitch

WTB  
1.25

WT125D Connector 1.25mm Pitch

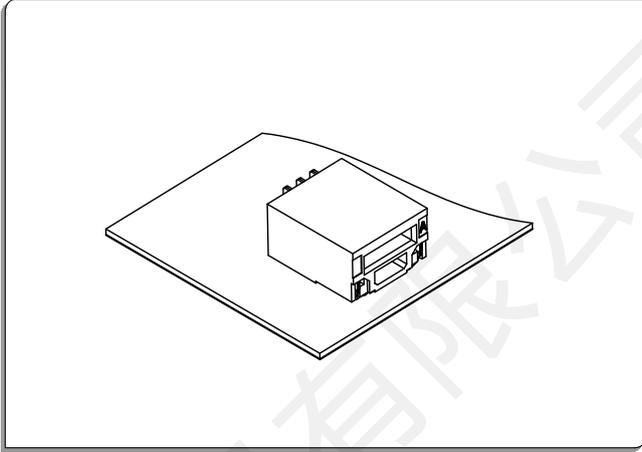


## ● 技术参数 SPECIFICATIONS

- 1、极数CKT: 3Pin
- 2、额定电流Current rating: 1A AC/DC
- 3、额定电压Voltage rating(max): 125V, AC/DC
- 4、工作温度Working Temperature:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ ,  
(含通电温度上升值)  
(Including temperature rise in applying electrical current)
- 5、接触电阻Contact resistance: 初始Initial value  $\leq 20\text{m}\Omega$   
环境测试后After environmental testing  $\leq 30\text{m}\Omega$
- 6、绝缘电阻Insulation resistance:  $\geq 100\text{M}\Omega$
- 7、耐电压Withstand voltage: 500VAC (rms)
- 8、适用基板厚度Applicable PC board thickness: 1.6mm to 2.0mm


## ● 安装尺寸 Mounting Measurement

### ● 卧式 Right Angle

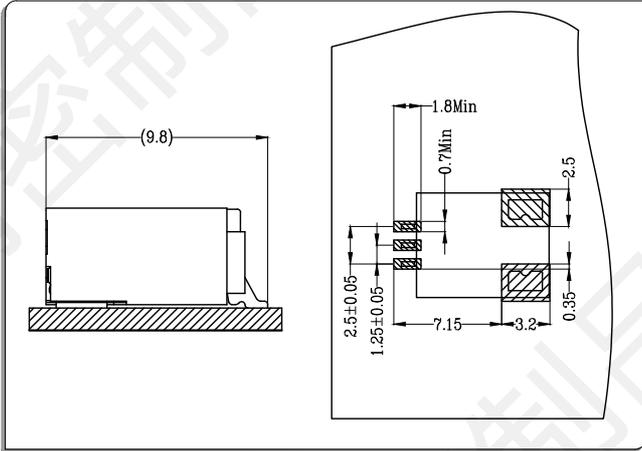

# WT125D Connector 1.25mm Pitch

- 针座 Wafer
- 材料与表面处理 Material and Finish:  
Housing:LCP UL94V-0 & Terminal:phosphor bronze &  
Fitting:Brass; Finish:Tin-plated & Gold-plated

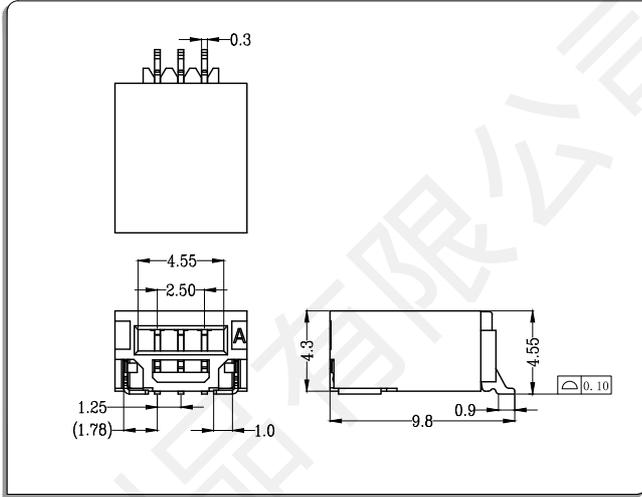

WTB  
1.25

WT125D Connector 1.25mm Pitch